

# CENG3420

## Lab 2-1: LC-3b Simulator

**Chong Wing (Sirius) Cheung**

Department of Computer Science and Engineering  
The Chinese University of Hong Kong

[cwcheung@cse.cuhk.edu.hk](mailto:cwcheung@cse.cuhk.edu.hk)

Feb. 25, 2016



香港中文大學  
The Chinese University of Hong Kong

# Overview

LC-3b Basis

LC-3b Assembly Examples

LC-3b Simulator

Task



# Overview

## LC-3b Basis

## LC-3b Assembly Examples

## LC-3b Simulator

## Task




# Assembler & Simulator

- ▶ Assembly language – symbolic (MIPS, LC-3b, ...)
- ▶ Machine language – binary
- ▶ Assembler is a program that
  - ▶ turns symbols into machine instructions.
  - ▶ EX: lc3b\_asm, SPIM, ...
- ▶ Simulator is a program that
  - ▶ mimics the behavior of a processor
  - ▶ usually in high-level language
  - ▶ EX: lc3b\_sim, SPIM, ...




# LC-3b

- ▶ LC-3b: **Little Computer 3, b** version.
- ▶ Relatively simple instruction set
- ▶ Most used in teaching for CS & CE
- ▶ Developed by Yale Patt@UT & Sanjay J. Patel@UIUC

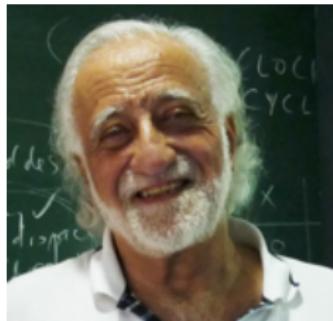

# LC-3b Instructions

- ▶ 16 bit instruction
- ▶ Memory address space is 16 bits →  $2^{16}$  locations
- ▶ Each memory address containing one byte (**eight** bits).
  
- ▶ One instruction or declaration per line

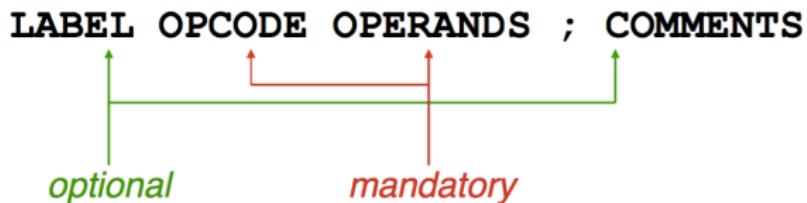

# Overview

LC-3b Basis

LC-3b Assembly Examples

LC-3b Simulator

Task



# LC-3b Example 1: Do nothing

“./lc3b\_asm nop.asm nop.cod”

nop.asm:

```
.ORIG x3000  
NOP  
NOP  
.END
```

nop.cod:

```
0x3000  
0x0000  
0x0000
```

- ▶ NOP instruction translates into machine code 0x0000.



# Assembler Directives

- ▶ Directives give information to the assembler
- ▶ Not executed by the program
- ▶ All directives start with a period ‘.’

.ORIG	Where to start in placing things in memory
.FILL	Declare a memory location (variable)
.END	Tells assembly where your program source ends



# Assembler Directives: .ORIG

- ▶ Tells where to put code in memory (starting location)
- ▶ Only one .ORIG allowed per program module
- ▶ PC is set to this address at start up
- ▶ Similar to the `main()` function in C
- ▶ Example:

```
.ORIG x3000
```



# Assembler Directives: .FILL

- ▶ Declaration and initialization of variables
- ▶ Always declaring words
- ▶ Examples:

```
flag          .FILL    x0001
counter      .FILL    x0002
letter        .FILL    x0041
letters       .FILL    x4241
```



# Assembler Directives: .END

- ▶ Tells the assembler where your program ends
- ▶ Only one .END allowed in your program module
- ▶ **NOT** where the execution stops!



# LC-3b Example 2: Count from 10 to 1

count10.asm:

```
.ORIG x3000
LEA R0, TEN
LDW R1, R0, #0
START ADD R1, R1, #-1
BRZ DONE
BR START

DONE TRAP x25
TEN .FILL x000A
.END
```

count10.cod:

```
0x3000
0xE005
0x6200
0x127F
0x0401
0x0FFD

0xF025
0x000A
```

- ▶ More explanations will be in Lab2-2.



# Overview

LC-3b Basis

LC-3b Assembly Examples

LC-3b Simulator

Task



# LC-3b Simulator: lc3b\_sim

- ▶ Download from course website  
(lab2-assignment.tar.gz)
- ▶ The simulator will
  - ▶ Execute the input LC-3b program
  - ▶ One instruction at a time
  - ▶ Modify the architectural state of the LC-3b
- ▶ Two main sections: the shell and the simulation routines
- ▶ Only need to work on simulation routine part.



# LC-3b Shell

```
./lc3b_sim [cod file]
```

```
LC-3b-SIM> ?  
-----LC-3b ISIM Help-----  
go - run program to completion  
run n - execute program for n instructions  
mdump low high - dump memory from low to high  
rdump - dump the register & bus values  
? - display this help menu  
quit - exit the program  
LC-3b-SIM> █
```



# LC-3b Architecture State

- ▶ Please refer to LC-3b\_ISA for more details
- ▶ PC
- ▶ General purpose registers (REGS): 8 registers
- ▶ Condition codes: N (negative); Z (zero); P (positive).

```
65 #define LC_3b_REGS 8
66
67 /* Data Structure for Latch */
68 typedef struct System_Latches_Struct{
69     int PC,                  /* program counter */
70     N,                      /* n condition bit */
71     Z,                      /* z condition bit */
72     P;                     /* p condition bit */
73     int REGS[LC_3b_REGS]; /* register file. */
74 } System_Latches;
75
76 System_Latches CURRENT_LATCHES, NEXT_LATCHES;
```



# LC-3b Memory Structure

```
46 /*****  
47 /* Main memory.  
48 *****/  
49 /* MEMORY[A][0] stores the least significant byte of word at word address A  
50   MEMORY[A][1] stores the most significant byte of word at word address A  
51 */  
52  
53 #define WORDS_IN_MEM    0x08000  
54 int MEMORY[WORDS_IN_MEM][2];  
55
```

Two word-aligned locations are to store one 16-bit word.

- ▶ addresses differ only in bit 0
- ▶ Locations x0006 and x0007 are word-aligned

```
276 void init_memory() {  
277     int i;  
278  
279     for (i=0; i < WORDS_IN_MEM; i++) {  
280         MEMORY[i][0] = 0;  
281         MEMORY[i][1] = 0;  
282     }  
283 }
```



# How to use LC-3b Simulator?

1. Compile your C codes through `make` command.
2. Run the compiled LC-3b simulator through `./lc3b_sim2 bench/xxx.cod`. Here the parameter is a machine code file.
3. In the simulator, run “n” instructions. When n = 3, run `3`
4. In the simulator, print out register information: `rdump`



# Overview

LC-3b Basis

LC-3b Assembly Examples

LC-3b Simulator

Task



# Lab2 Task 1

architectural state:

- ▶ In `process_instruction()`, update `NEXT_LATCHES`
- ▶ At this moment, only update (increase PC value)

memory:

- ▶ Given `CURRENT_LATCHES.PC`, read related word in memory
- ▶ Implement function `int memWord (int startAddr)`



# Task 1 Golden Results: nop.cod

Output after run 2

```
process_instruction() | curInstr = 0x0000
process_instruction() | curInstr = 0x0000
```

Output after rdump:

```
Instruction Count : 2
PC                 : 0x3004
CCs: N = 0   Z = 1   P = 0
Registers:
0: 0x0000
1: 0x0000
2: 0x0000
3: 0x0000
4: 0x0000
5: 0x0000
6: 0x0000
7: 0x0000
```



# Task 1 Golden Results: count10.cod

Output after run 7:

```
process_instruction() | curInstr = 0xe005
process_instruction() | curInstr = 0x6200
process_instruction() | curInstr = 0x127f
process_instruction() | curInstr = 0x0401
process_instruction() | curInstr = 0x0ffd
process_instruction() | curInstr = 0xf025
Simulator halted
```

Output after rdump:

```
Instruction Count : 6
PC : 0x0000
CCs: N = 0 Z = 1 P = 0
Registers:
0: 0x0000
1: 0x0000
2: 0x0000
3: 0x0000
4: 0x0000
5: 0x0000
6: 0x0000
7: 0x300c
```



# Task 1 Golden Results: toupper.cod

Output after run 18:

```
process_instruction() | curInstr = 0xe00f
process_instruction() | curInstr = 0x6000
process_instruction() | curInstr = 0x6000
process_instruction() | curInstr = 0xe20d
process_instruction() | curInstr = 0x6240
process_instruction() | curInstr = 0x6240
process_instruction() | curInstr = 0x2400
process_instruction() | curInstr = 0x0406
process_instruction() | curInstr = 0x14b0
process_instruction() | curInstr = 0x14b0
process_instruction() | curInstr = 0x3440
process_instruction() | curInstr = 0x1021
process_instruction() | curInstr = 0x1261
process_instruction() | curInstr = 0x0ff8
process_instruction() | curInstr = 0x3440
process_instruction() | curInstr = 0xf025
Simulator halted
```



# Task 1 Golden Results: toupper.cod (cont.)

Output after rdump:

```
Instruction Count : 16
PC                : 0x0000
CCs: N = 0   Z = 1   P = 0
Registers:
0: 0x0000
1: 0x0000
2: 0x0000
3: 0x0000
4: 0x0000
5: 0x0000
6: 0x0000
7: 0x3020
```

