

# Undecidability and Reductions

CSCI 3130 Formal Languages and Automata Theory

---

Siu On CHAN

Fall 2018

Chinese University of Hong Kong

$A_{TM} = \{\langle M, w \rangle \mid \text{Turing machine } M \text{ accepts input } w\}$

## Turing's Theorem


The language  $A_{TM}$  is undecidable

Note: a Turing machine  $M$  may take as input **its own description**  $\langle M \rangle$

# Proof of Turing's Theorem

Proof by contradiction:


Suppose  $A_{TM}$  is decidable, then some TM  $H$  decides  $A_{TM}$ :



# Proof of Turing's Theorem

Proof by contradiction:

Suppose  $A_{TM}$  is decidable, then some TM  $H$  decides  $A_{TM}$ :

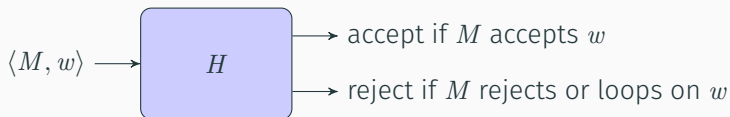


Construct a new TM  $D$  (that uses  $H$  as a subroutine):


On input  $\langle M \rangle$  (i.e. the description of a Turing machine  $M$ ),

1. Run  $H$  on input  $\langle M, \langle M \rangle \rangle$
2. Output the opposite of  $H$ : If  $H$  accepts,  $D$  rejects; if  $H$  rejects,  $D$  accepts


# Proof of Turing's theorem

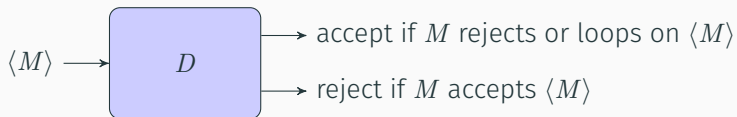


What happens when  $M = D$ ?

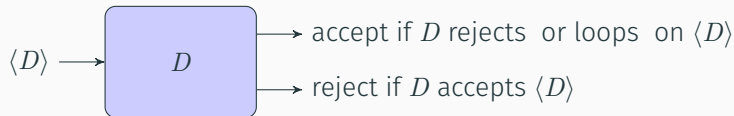

# Proof of Turing's theorem

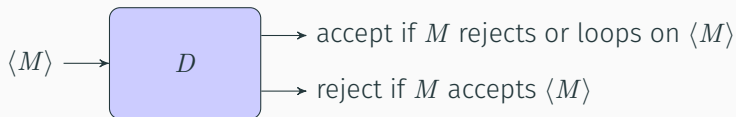

What happens when  $M = D$ ?

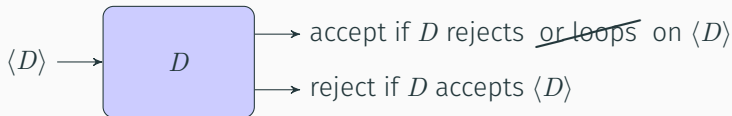

$H$  never loops indefinitely, neither does  $D$

If  $D$  rejects  $\langle D \rangle$ , then  $D$  accepts  $\langle D \rangle$

If  $D$  accepts  $\langle D \rangle$ , then  $D$  rejects  $\langle D \rangle$

Contradiction!  $D$  cannot exist!  $H$  cannot exist!

# Proof of Turing's theorem: conclusion

Proof by contradiction

Assume  $A_{TM}$  is decidable

Then there are TM  $H$ ,  $H'$  and  $D$

But  $D$  cannot exist!

Conclusion

The language  $A_{TM}$  is **undecidable**

# Diagonalization

		all possible inputs $w$				
		$\epsilon$	<b>0</b>	<b>1</b>	<b>00</b>	...
all possible Turing machines	$M_1$	acc	rej	rej	acc	
	$M_2$	rej	acc	loop	rej	...
	$M_3$	rej	loop	rej	rej	
	$M_4$	acc	rej	acc	loop	
			$\vdots$			

Write an infinite table for the pairs  $(M, w)$

(Entries in this table are all made up for illustration)



# Diagonalization

		inputs $w$				
		$\langle M_1 \rangle$	$\langle M_2 \rangle$	$\langle M_3 \rangle$	$\langle M_4 \rangle$	...
all possible Turing machines	$M_1$	acc	loop	rej	rej	
	$M_2$	rej	rej	acc	rej	...
	$M_3$	loop	acc	acc	acc	
	$M_4$	acc	acc	loop	acc	
			$\vdots$			

Only look at those  $w$  that describe Turing machines

# Diagonalization

		inputs $w$				
		$\langle M_1 \rangle$	$\langle M_2 \rangle$	$\langle M_3 \rangle$	$\langle M_4 \rangle$	...
all possible Turing machines	$M_1$	acc	loop	rej	rej	
	$M_2$	rej	rej	acc	rej	...
	$M_3$	loop	acc	acc	acc	
	$\vdots$		$\vdots$			
	$D$	rej	acc	rej	rej	
	$\vdots$		$\vdots$			


If  $A_{TM}$  is decidable, then TM  $D$  is in the table

# Diagonalization

		inputs $w$				
		$\langle M_1 \rangle$	$\langle M_2 \rangle$	$\langle M_3 \rangle$	$\langle M_4 \rangle$	...
all possible Turing machines	$M_1$	acc	loop	rej	rej	
	$M_2$	rej	rej	acc	rej	...
	$M_3$	loop	acc	acc	acc	
	$\vdots$		$\vdots$			
	$D$	rej	acc	rej	rej	
	$\vdots$		$\vdots$			

$D$  does the opposite of the diagonal entries

$D$  on  $\langle M_i \rangle =$  opposite of  $M_i$  on  $\langle M_i \rangle$

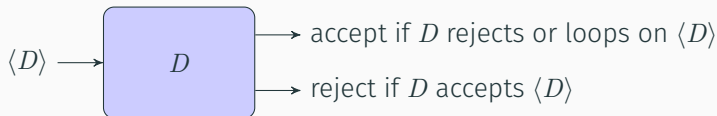

# Diagonalization

		inputs $w$					
		$\langle M_1 \rangle$	$\langle M_2 \rangle$	$\langle M_3 \rangle$	$\langle M_4 \rangle$	...	$\langle D \rangle$
all possible Turing machines	$M_1$	acc	loop	rej	rej		loop
	$M_2$	rej	rej	acc	rej	...	acc
	$M_3$	loop	acc	acc	acc		rej
	$\vdots$		$\vdots$				
	$D$	rej	acc	rej	rej		?
	$\vdots$		$\vdots$				

We run into trouble when we look at  $(D, \langle D \rangle)$

# Unrecognizable languages

The language  $A_{TM}$  is recognizable but not decidable

How about languages that are **not recognizable**?

$$\begin{aligned}\overline{A_{TM}} &= \{\langle M, w \rangle \mid M \text{ is a TM that does not accept } w\} \\ &= \{\langle M, w \rangle \mid M \text{ rejects or loops on input } w\}\end{aligned}$$

Claim

The language  $\overline{A_{TM}}$  is not recognizable

## Theorem

If  $L$  and  $\bar{L}$  are both recognizable, then  $L$  is decidable

Proof of Claim from Theorem:

We know  $A_{TM}$  is recognizable

if  $\overline{A_{TM}}$  were also, then  $A_{TM}$  would be decidable

But Turing's Theorem says  $A_{TM}$  is not decidable

# Unrecognizable languages

## Theorem

If  $L$  and  $\bar{L}$  are both recognizable, then  $L$  is decidable

Proof idea:

Let  $M =$  TM recognizing  $L$ ,  $M' =$  TM recognizing  $\bar{L}$

The following Turing machine  $N$  decides  $L$ :

On input  $w$ ,

1. Simulate  $M$  on input  $w$ . If  $M$  accepts,  $N$  accepts.
2. Simulate  $M'$  on input  $w$ . If  $M'$  accepts,  $N$  rejects.

# Unrecognizable languages

## Theorem

If  $L$  and  $\bar{L}$  are both recognizable, then  $L$  is decidable

Proof idea:

Let  $M =$  TM recognizing  $L$ ,  $M' =$  TM recognizing  $\bar{L}$

The following Turing machine  $N$  decides  $L$ :

On input  $w$ ,

1. Simulate  $M$  on input  $w$ . If  $M$  accepts,  $N$  accepts.
2. Simulate  $M'$  on input  $w$ . If  $M'$  accepts,  $N$  rejects.

Problem: If  $M$  loops on  $w$ , we will never go to step 2



# Unrecognizable languages

## Theorem

If  $L$  and  $\bar{L}$  are both recognizable, then  $L$  is decidable

Proof idea (2nd attempt):

Let  $M = \text{TM recognizing } L$ ,  $M' = \text{TM recognizing } \bar{L}$

The following Turing machine  $N$  decides  $L$ :

On input  $w$ ,

For  $t = 0, 1, 2, 3, \dots$

Simulate first  $t$  transitions of  $M$  on input  $w$ .

If  $M$  accepts,  $N$  accepts.

Simulate first  $t$  transitions of  $M'$  on input  $w$ .

If  $M'$  accepts,  $N$  rejects.

# Reductions

---

## Another undecidable language

$\text{HALT}_{\text{TM}} = \{\langle M, w \rangle \mid M \text{ is a TM that halts on input } w\}$

We'll show:

$\text{HALT}_{\text{TM}}$  is an undecidable language

We will argue that


If  $\text{HALT}_{\text{TM}}$  is decidable, then so is  $A_{\text{TM}}$

...but by Turing's theorem,  $A_{\text{TM}}$  is not


# Undecidability of halting

If  $\text{HALT}_{\text{TM}}$  can be decided, so can  $A_{\text{TM}}$

Suppose  $H$  decides  $\text{HALT}_{\text{TM}}$



We want to construct a TM  $S$  that decides  $A_{\text{TM}}$

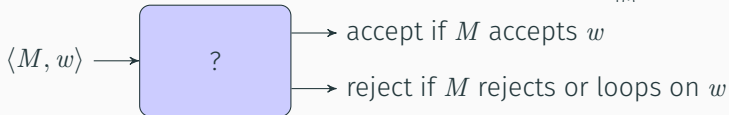

# Undecidability of halting

$\text{HALT}_{\text{TM}} = \{\langle M, w \rangle \mid M \text{ is a TM that halts on input } w\}$

$A_{\text{TM}} = \{\langle M, w \rangle \mid M \text{ is a TM that accepts input } w\}$

Suppose  $\text{HALT}_{\text{TM}}$  is decidable

Let  $H$  be a TM that decides  $\text{HALT}_{\text{TM}}$

The following TM  $S$  decides  $A_{\text{TM}}$

On input  $\langle M, w \rangle$ :

Run  $H$  on input  $\langle M, w \rangle$

If  $H$  rejects, reject

If  $H$  accepts, run universal TM  $U$  on input  $\langle M, w \rangle$

If  $U$  accepts, accept; else reject

Steps for showing that a language  $L$  is undecidable:

1. If some TM  $R$  decides  $L$
2. Using  $R$ , build another TM  $S$  that decides  $A_{TM}$

But  $A_{TM}$  is undecidable, so  $R$  cannot exist

## Example 1

$$A'_{\text{TM}} = \{\langle M \rangle \mid M \text{ is a TM that accepts input } \varepsilon\}$$

Is  $A'_{\text{TM}}$  decidable? Why?

## Example 1

$$A'_{\text{TM}} = \{\langle M \rangle \mid M \text{ is a TM that accepts input } \varepsilon\}$$

Is  $A'_{\text{TM}}$  decidable? Why?

Undecidable!

Intuitive reason:

To know whether  $M$  accepts  $\varepsilon$  seems to require **simulating**  $M$


But then we need to know whether  $M$  halts

Let's justify this intuition




## Example 1: Figuring out the reduction

Suppose  $A'_{TM}$  can be decided by a TM  $R$



We want to build a TM  $S$

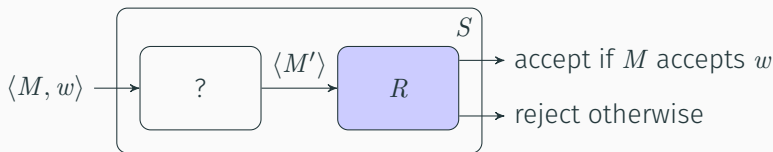

$M'$  should be a Turing machine such that

$M'$  on input  $\varepsilon = M$  on input  $w$

## Example 1: Implementing the reduction




$M'$  should be a Turing machine such that

$M'$  on input  $\varepsilon = M$  on input  $w$

Description of the machine  $M'$ :

On input  $z$

1. Simulate  $M$  on input  $w$
2. If  $M$  accepts  $w$ , accept
3. If  $M$  rejects  $w$ , reject

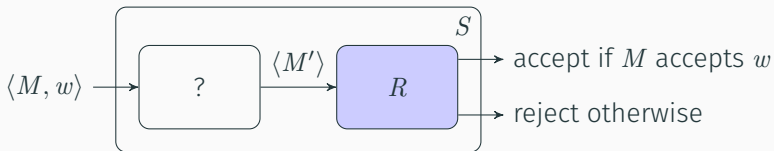

Description of  $S$ :

On input  $\langle M, w \rangle$  where  $M$  is a TM

1. Construct the following TM  $M'$ :

$M'$  = a TM such that on input  $z$ ,

Simulate  $M$  on input  $w$  and accept/reject according to  $M$

2. Run  $R$  on input  $\langle M' \rangle$  and accept/reject according to  $R$

## Example 1: The formal proof

$$A'_{\text{TM}} = \{\langle M \rangle \mid M \text{ is a TM that accepts input } \varepsilon\}$$

$$A_{\text{TM}} = \{\langle M, w \rangle \mid M \text{ is a TM that accepts input } w\}$$

Suppose  $A'_{\text{TM}}$  is decidable by a TM  $R$ .

Consider the TM  $S$ : On input  $\langle M, w \rangle$  where  $M$  is a TM

1. Construct the following TM  $M'$ :

$M'$  = a TM such that on input  $z$ ,

Simulate  $M$  on input  $w$  and accept/reject according to  $M$

2. Run  $R$  on input  $\langle M' \rangle$  and accept/reject according to  $R$

Then  $S$  accepts  $\langle M, w \rangle$  if and only if  $M$  accepts  $w$

So  $S$  decides  $A_{\text{TM}}$ , which is impossible

## Example 2

$A''_{\text{TM}} = \{\langle M \rangle \mid M \text{ is a TM that accepts some input strings}\}$

Is  $A''_{\text{TM}}$  decidable? Why?

## Example 2

$A''_{TM} = \{\langle M \rangle \mid M \text{ is a TM that accepts some input strings}\}$

Is  $A''_{TM}$  decidable? Why?

Undecidable!

Intuitive reason:


To know whether  $M$  accepts some strings seems to require  
**simulating**  $M$

But then we need to know whether  $M$  halts


Let's justify this intuition

## Example 2: Figuring out the reduction

Suppose  $A''_{TM}$  can be decided by a TM  $R$



We want to build a TM  $S$

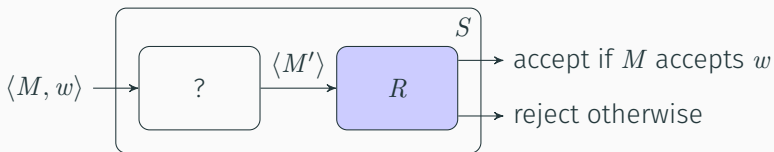

$M'$  should be a Turing machine such that

$M'$  accepts some strings if and only if  $M$  accepts input  $w$

# Implementing the reduction

**Task:** Given  $\langle M, w \rangle$ , construct  $M'$  so that

If  $M$  accepts  $w$ , then  $M'$  accepts some input

If  $M$  does not accept  $w$ , then  $M'$  accepts no inputs

$M'$  = a TM such that on input  $z$ ,

1. Simulate  $M$  on input  $w$
2. If  $M$  accepts, accept
3. Otherwise, reject



## Example 2: The formal proof

$$A''_{\text{TM}} = \{\langle M \rangle \mid M \text{ is a TM that accepts some input}\}$$

$$A_{\text{TM}} = \{\langle M, w \rangle \mid M \text{ is a TM that accepts input } w\}$$

Suppose  $A''_{\text{TM}}$  is decidable by a TM  $R$ .

Consider the TM  $S$ : On input  $\langle M, w \rangle$  where  $M$  is a TM

1. Construct the following TM  $M'$ :

$M'$  = a TM such that on input  $z$ ,

Simulate  $M$  on input  $w$  and accept/reject according to  $M$

2. Run  $R$  on input  $\langle M' \rangle$  and accept/reject according to  $R$

Then  $S$  accepts  $\langle M, w \rangle$  if and only if  $M$  accepts  $w$

So  $S$  decides  $A_{\text{TM}}$ , which is impossible

## Example 3

$E_{TM} = \{\langle M \rangle \mid M \text{ is a TM that accepts no input}\}$

Is  $E_{TM}$  decidable?

## Example 3

$E_{TM} = \{\langle M \rangle \mid M \text{ is a TM that accepts no input}\}$

Is  $E_{TM}$  decidable?

Undecidable! We will show:

If  $E_{TM}$  can be decided by some TM  $R$

Then  $A''_{TM}$  can be decided by another TM  $S$

$A''_{TM} = \{\langle M \rangle \mid M \text{ is a TM that accepts some input strings}\}$

## Example 3

$E_{TM} = \{\langle M \rangle \mid M \text{ is a TM that accepts no input}\}$

$A''_{TM} = \{\langle M \rangle \mid M \text{ is a TM that accepts some input}\}$

Note that  $E_{TM}$  and  $A''_{TM}$  are complement of each other  
(except ill-formatted strings, which we will ignore)

Suppose  $E_{TM}$  can be decided by some TM  $R$

Consider the following TM  $S$ :

On input  $\langle M \rangle$  where  $M$  is a TM

1. Run  $R$  on input  $\langle M \rangle$
2. If  $R$  accepts, **reject**
3. If  $R$  rejects, **accept**

Then  $S$  decides  $A''_{TM}$ , a contradiction

## Example 4

$EQ_{TM} = \{\langle M_1, M_2 \rangle \mid M_1 \text{ and } M_2 \text{ are TMs such that } L(M_1) = L(M_2)\}$

Is  $EQ_{TM}$  decidable?

## Example 4

$EQ_{TM} = \{\langle M_1, M_2 \rangle \mid M_1 \text{ and } M_2 \text{ are TMs such that } L(M_1) = L(M_2)\}$

Is  $EQ_{TM}$  decidable?

Undecidable!

We will show that  $EQ_{TM}$  can be decided by some TM  $R$

then  $E_{TM}$  can be decided by another TM  $S$

## Example 4: Setting up the reduction

$$EQ_{TM} = \{\langle M_1, M_2 \rangle \mid M_1 \text{ and } M_2 \text{ are TMs such that } L(M_1) = L(M_2)\}$$

$$E_{TM} = \{\langle M \rangle \mid M \text{ is a TM that accepts no input}\}$$

Given  $\langle M \rangle$ , we need to construct  $\langle M_1, M_2 \rangle$  so that

If  $M$  accepts no input, then  $M_1$  and  $M_2$  accept same set of inputs

If  $M$  accepts some input, then  $M_1$  and  $M_2$  do not accept same set of inputs

Idea: Make  $M_1 = M$

Make  $M_2$  accept nothing

## Example 4: The formal proof

$$EQ_{TM} = \{\langle M_1, M_2 \rangle \mid M_1 \text{ and } M_2 \text{ are TMs such that } L(M_1) = L(M_2)\}$$

$$E_{TM} = \{\langle M \rangle \mid M \text{ is a TM that accepts no input}\}$$

Suppose  $EQ_{TM}$  is decidable and  $R$  decides it

Consider the following TM  $S$ :

On input  $\langle M \rangle$  where  $M$  is a TM

1. Construct a TM  $M_2$  that rejects every input  $z$
2. Run  $R$  on input  $\langle M, M_2 \rangle$  and accept/reject according to  $R$

Then  $S$  accepts  $\langle M \rangle$  if and only if  $M$  accepts no input

So  $S$  decides  $E_{TM}$  which is impossible